Model BV-E-Class Dual Station Manual Sheet Fed Vacuum Forming Machine

Bel-O-Vac Forming the world today

Equipment Specifications:

Belovac Industries ● 435 E. Lincoln St., Ste A ● Banning, Ca 92220-4527 Office: (951) 741-4822 ● Fax: (951) 922-1494


www.belovac.com

Equipment Features:

- Sheet size standard 53" x 103" (Custom sizes available at request)
- Depth of draw 32 inches
- Fully adjustable material clamping
- Tooling table: 3 1/4" (8cm) Pneumatic drive cylinder 300lb (136kg) seal pressure with adjustable slotted track for rapid tool mounting
- Solid state programmable heat timing unit, coupled with programmable percentage control unit
- Heater Panel: 88,000 watts infared radiant panel, with size-down option
- Vacuum Pump:
 High volume, Hi-vacuum pump, Onboard 80 Gallon surge tank
- Construction: Heavy wall5" tubular frame
- Recommended for plastics Acrylic - Polycarbonate -ABS - PVC - PET -Poly styrene- kydex -Poly propylene
- Plastic gauges up to 3/8" (.64cm)

Electric Requirements:

• Power requirement: 240 - 480 three phase

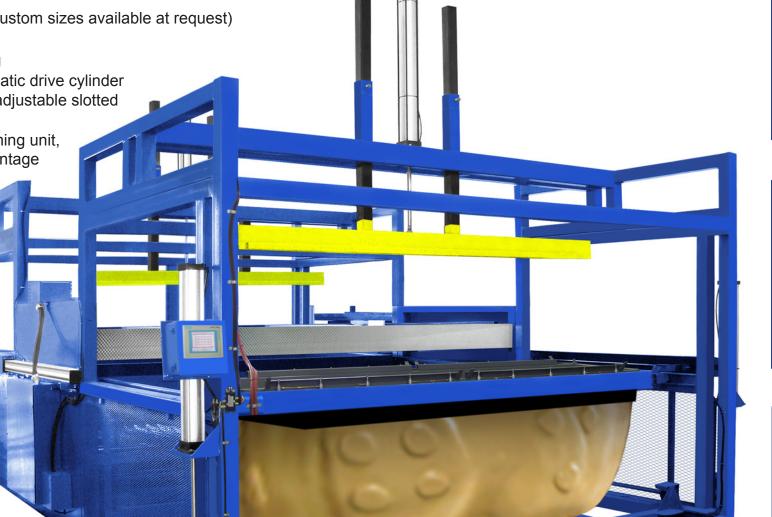



Model BV E-Class 53" x 33" or 53" x 53" Double-Ended Shuttle Vacuum Former



Option: Tooling Travel 32" Dual Cylinder Spur and Rack Guided



Option: PLC Heat Multi-zone Control